


SOT-563

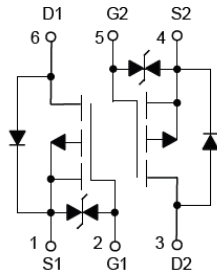

- V_{DS} -20V
- I_D -0.5A
- $R_{DS(ON)}$ (at $V_{GS}=-4.5V$) 850 mohm
- $R_{DS(ON)}$ (at $V_{GS}=-2.5V$) 1200 mohm
- $R_{DS(ON)}$ (at $V_{GS}=-1.8V$) 2000 mohm
- ESD Protected Up to 2.0KV (HBM)

- Trench Power LV MOSFET technology
- High Density Cell Design for Low $R_{DS(ON)}$
- High Speed switching

- Interfacing, Logic switch
- Load switch
- Power management

($T_A=25$ unless otherwise noted)

Drain-source Voltage		V_{DS}	-20	V
Gate-source Voltage		V_{GS}	12	V
Drain Current	$T_A=25$ Steady State	I_D	-0.5	A
	$T_A=70$ Steady State		-0.4	
Pulsed Drain Current ^A		I_{DM}	-2.6	A
Total Power Dissipation @ $T_A=25$ Steady State		P_D	0.18	W
Thermal Resistance Junction-to-Ambient @ Steady State ^B		$R_{\theta JA}$	694	W
Junction and Storage Temperature Range		T_J, T_{STG}	-55 +150	

(Example)

YJL3139KAX	F2	39A	3000	30000	120000	7" reel
------------	----	-----	------	-------	--------	---------



(T_J=25 unless otherwise noted)

Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} = 0V, I _D =-250μA	-20			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =-20V, V _{GS} =0V, T _C =25			-1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} = 10V, V _{DS} =0V		1.5	10	μA
		V _{GS} = 8V, V _{DS} =0V		500	2000	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D =-250μA	-0.35	-0.62	-1.2	V
Static Drain-Source On-Resistance	R _{DS(ON)}	V _{GS} = -4.5V, I _D =-0.5A		580	850	mΩ
		V _{GS} = -2.5V, I _D =-0.3A		855	1200	
		V _{GS} = -1.8V, I _D =-0.2A		1350	2000	
Diode Forward Voltage	V _{SD}	I _S =-0.5A, V _{GS} =0V		-0.8	-1.2	V
Maximum Body-Diode Continuous Current	I _S				-0.5	A
Input Capacitance	C _{iss}	V _{DS} =-10V, V _{GS} =0V, f=1MHZ		71		pF
Output Capacitance	C _{oss}			20		
Reverse Transfer Capacitance	C _{rss}			15		
Total Gate Charge	Q _g	V _{GS} =-4.5V, V _{DD} =-10V, I _D =-0.5A		1.24		
Gate Source Charge	Q _{gs}			0.37		
Gate Drain Charge	Q _{gd}			0.27		
Reverse Recovery Chrage	Q _{rr}	I _F =-0.5A, di/dt=-20A/us		0.97		
Reverse Recovery Time	t _{rr}			26		
Turn-on Delay Time	t _{D(on)}	V _{GS} =-4.5V, V _{DD} =-10V, R _L =2.5Ω, R _{GEN} =3Ω		4		ns
Turn-on Rise Time	t _r			19		
Turn-off Delay Time	t _{D(off)}			16		
Turn-off Fall Time	t _f			25		

- A. Pulse Test: Pulse Width 300us, Duty cycle 2%.
 B. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch.

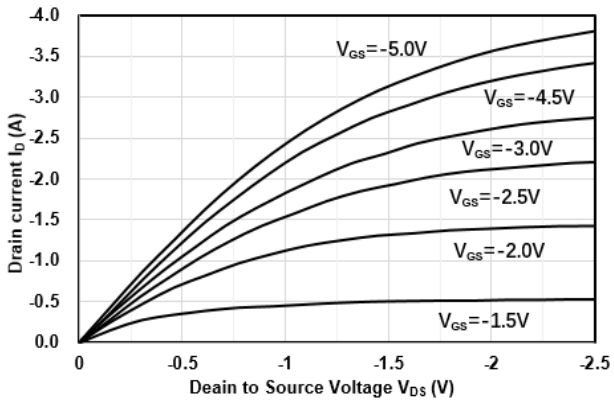


Figure1. Output Characteristics

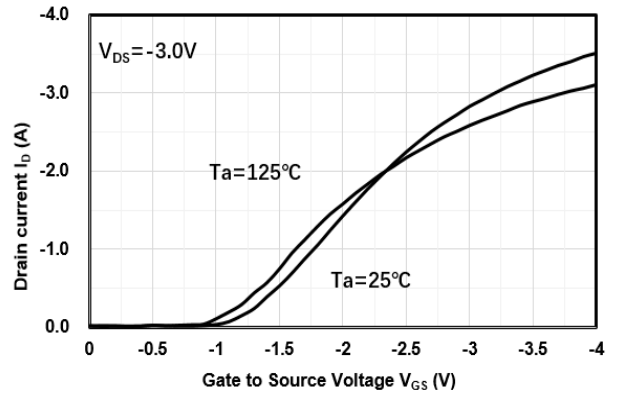


Figure2. Transfer Characteristics

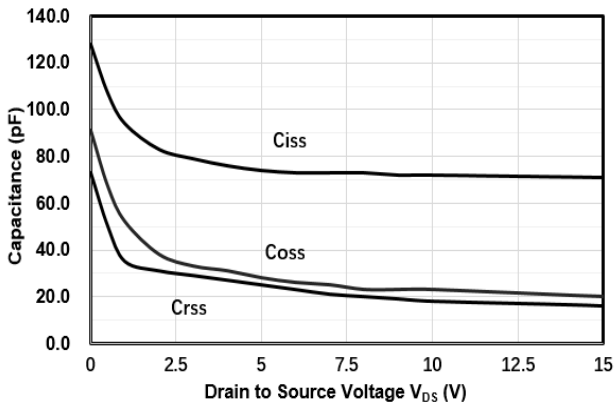


Figure3. Capacitance Characteristics

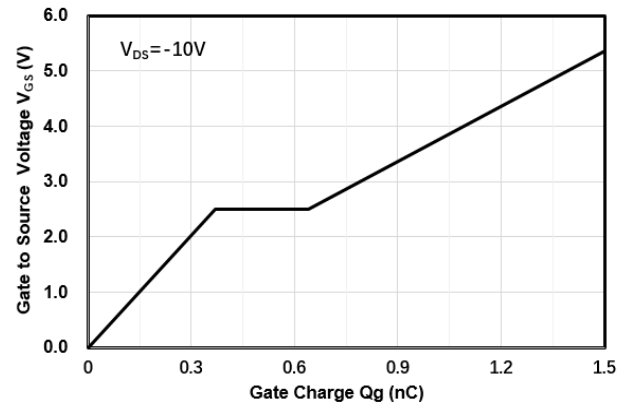


Figure4. Gate Charge

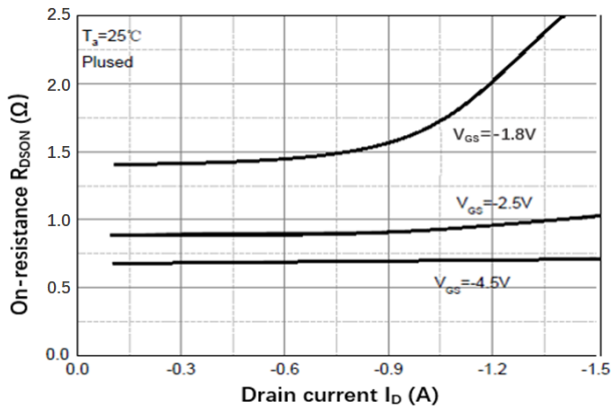


Figure5. Drain-Source on Resistance

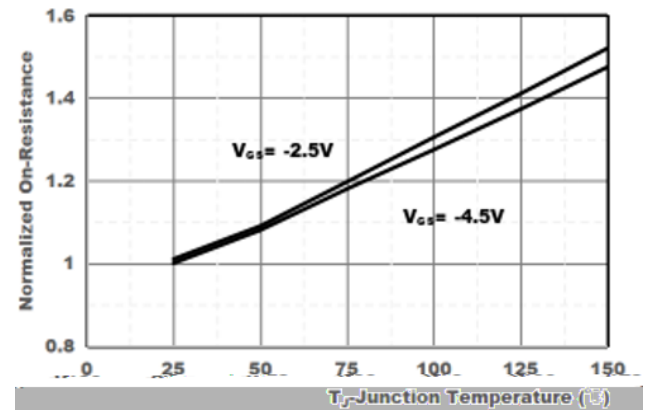


Figure6. Drain-Source on Resistance

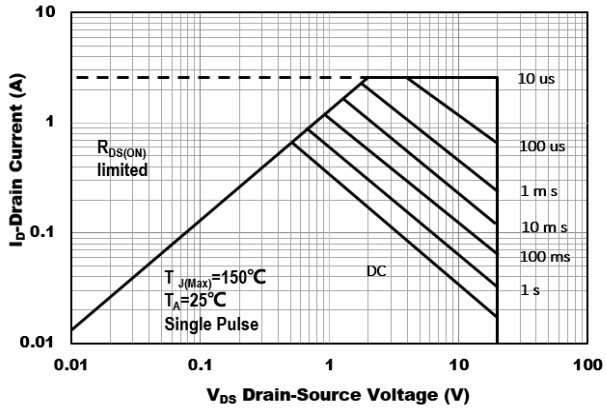


Figure7. Safe Operation Area



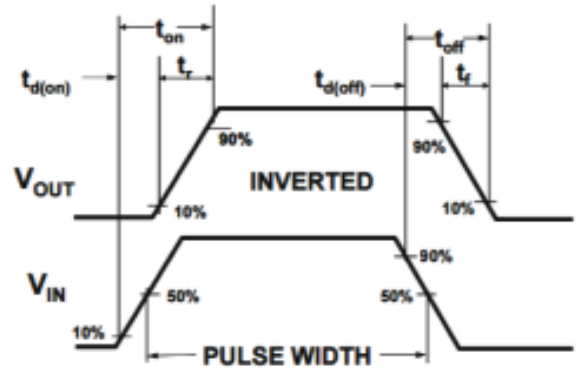


Figure8. Switching wave

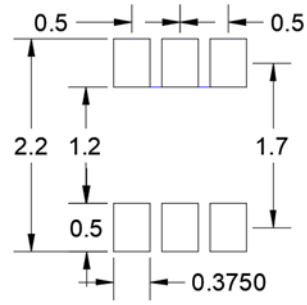

SOT-563

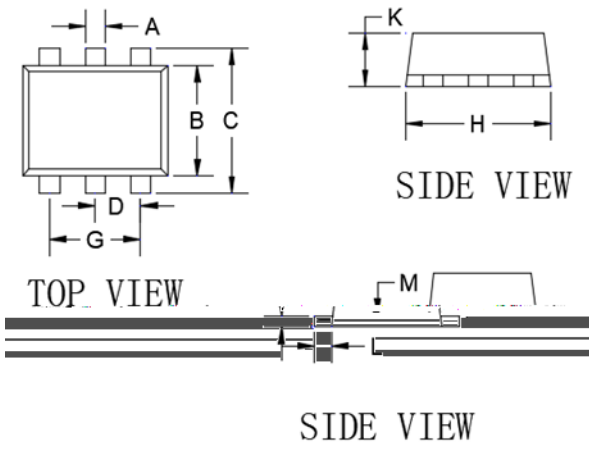

单位: mm

SUGGESTED SOLDER PAD LAYOUT

DIMENSIONS				
DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.006	0.011	0.150	0.300
B	0.043	0.051	1.100	1.300
C	0.059	0.067	1.500	1.700
D	0.016	0.024	0.400	0.600
G	0.035	0.043	0.900	1.100
H	0.059	0.067	1.500	1.700
K	0.021	0.026	0.550	0.650
L	0.004	0.011	0.100	0.300
M	0.004	0.007	0.100	0.180



The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.



1.0	2021.10.23	New release	Yanqiang He