





YJG120G10BR

Electrical Characteristics










Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Dynamic Parameters						
Switching Parameters						

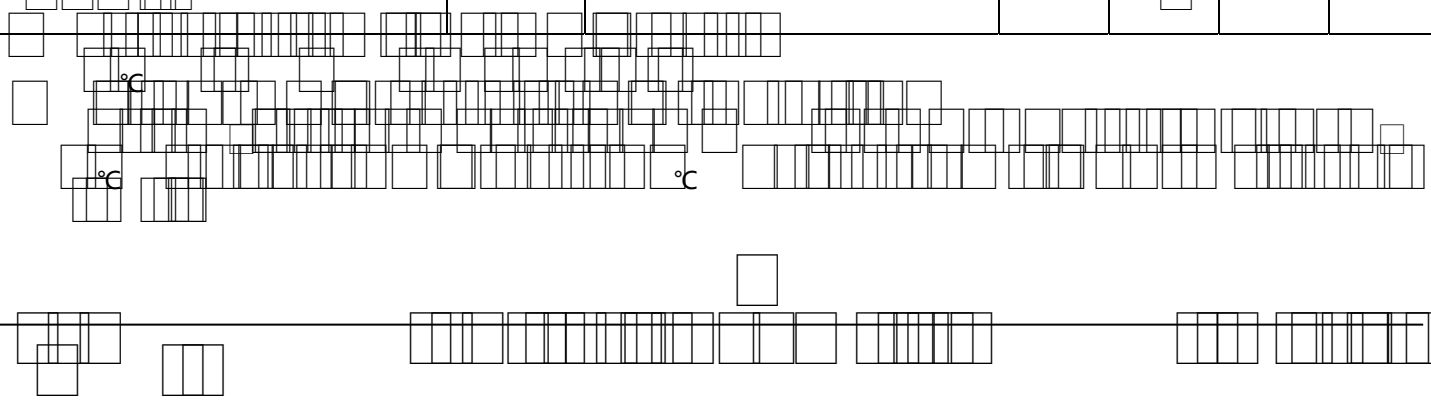










YJG120G10BR

Typical Electrical and Thermal Characteristics Diagrams

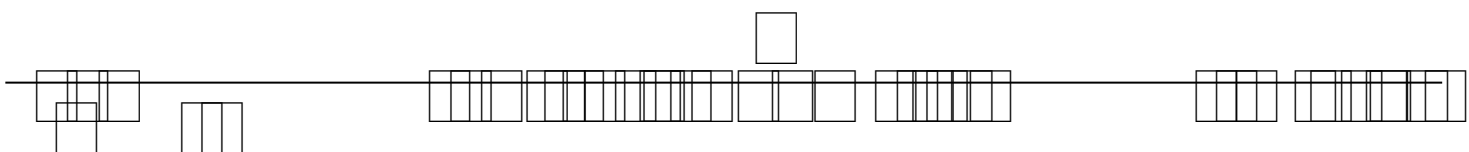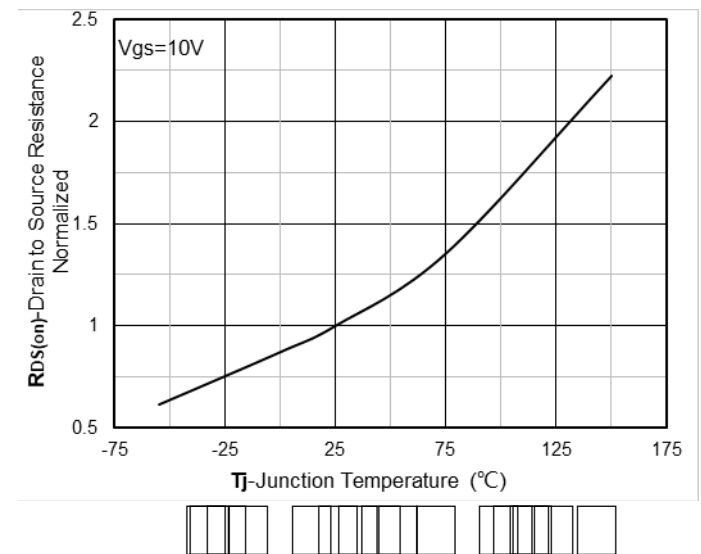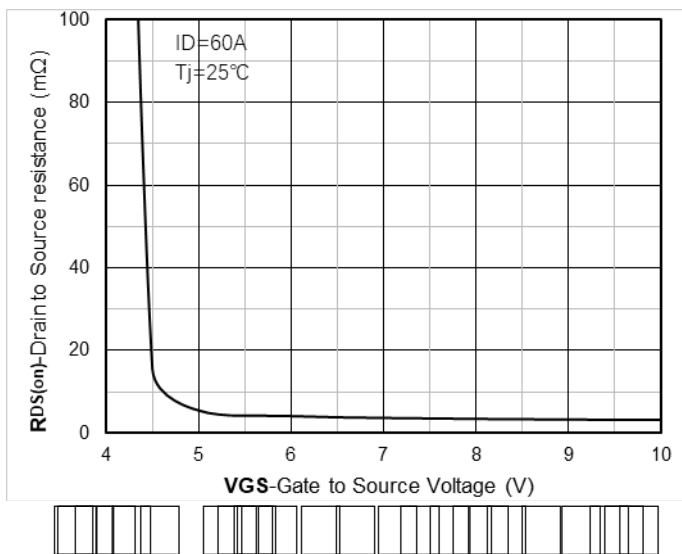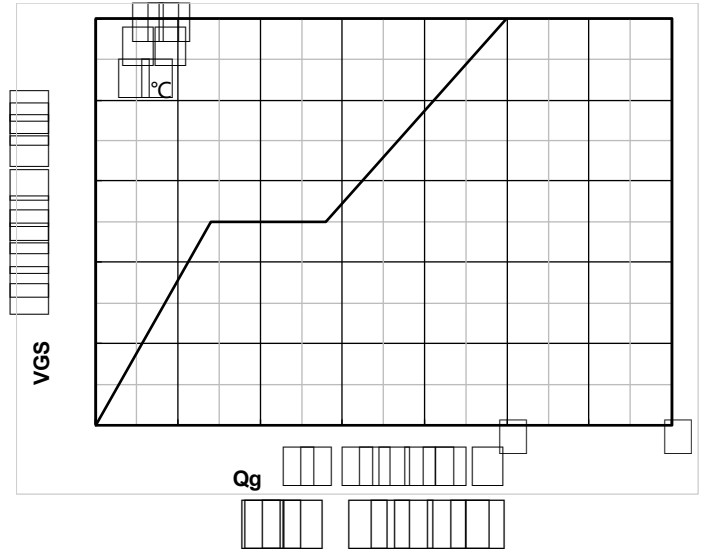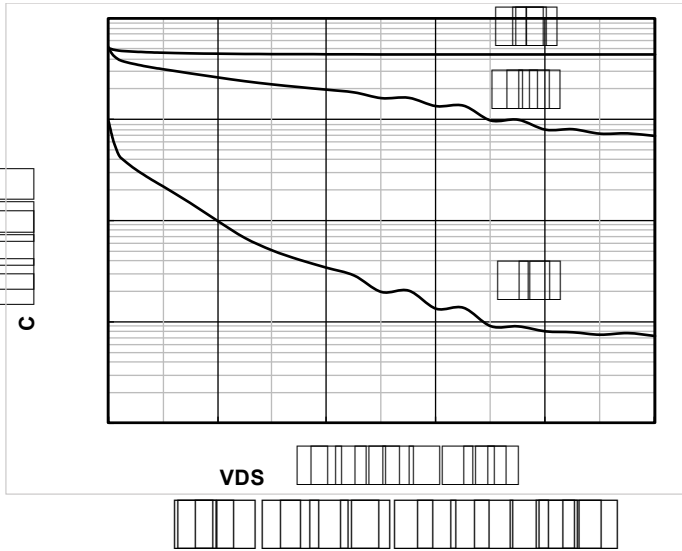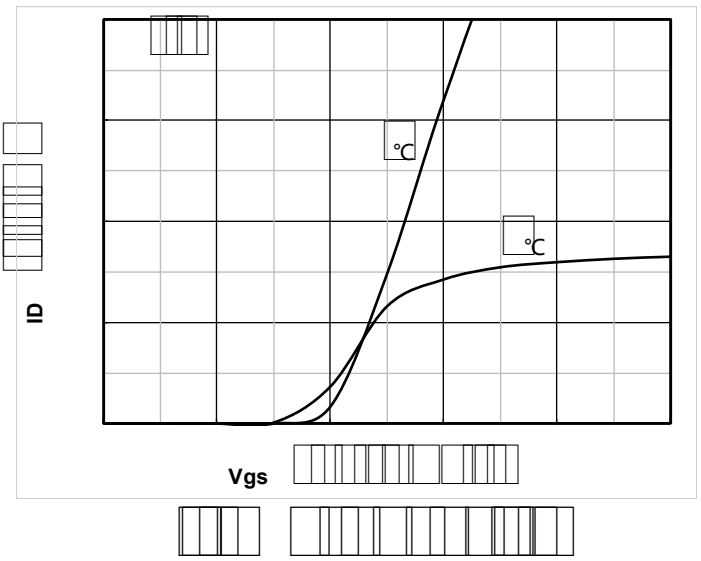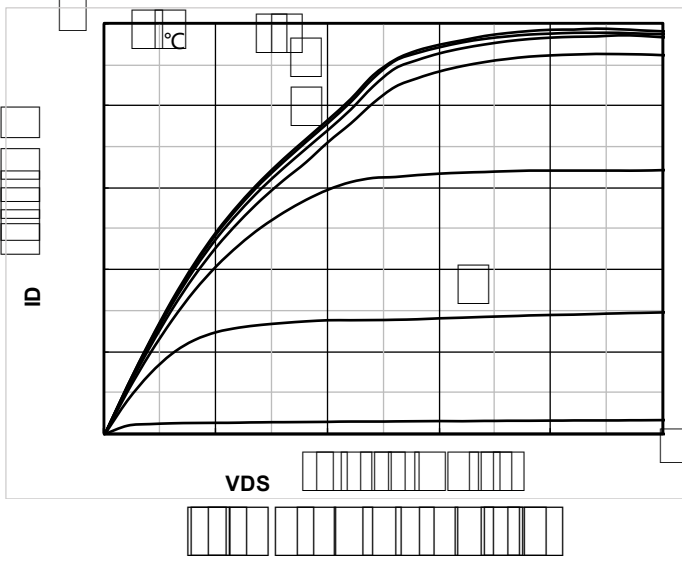






YJG120G10BR

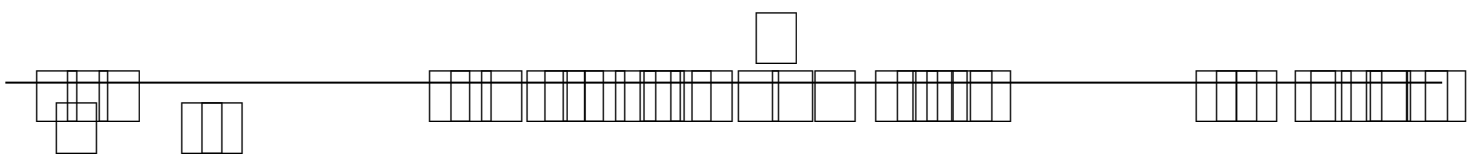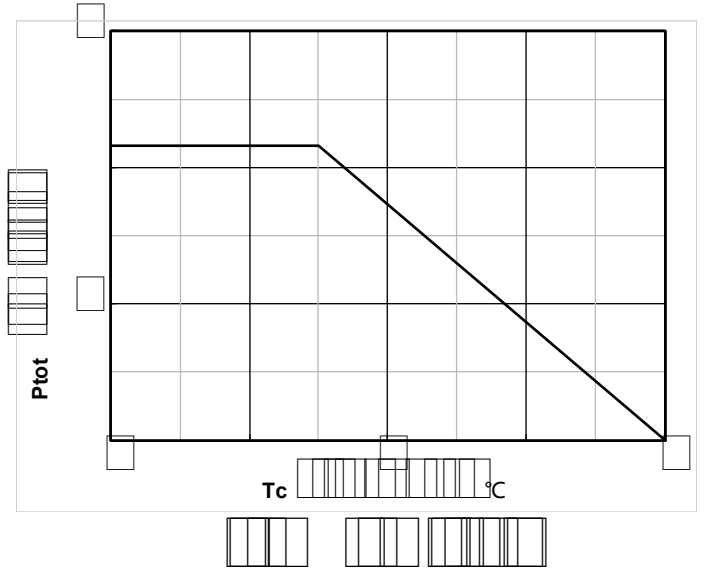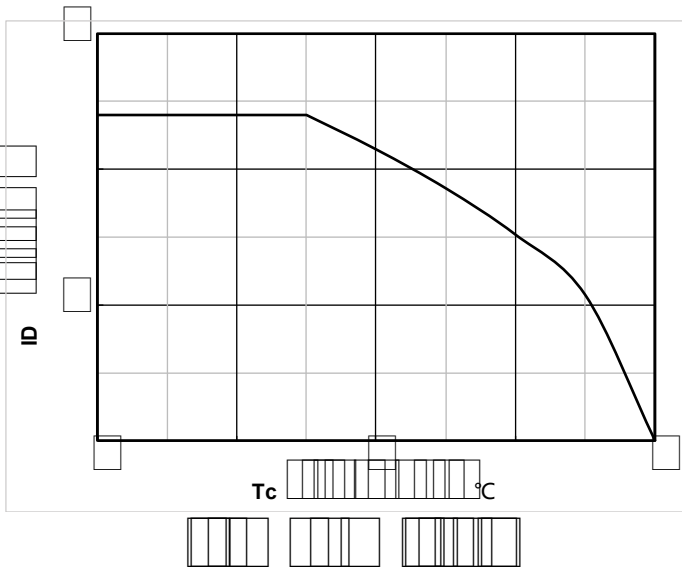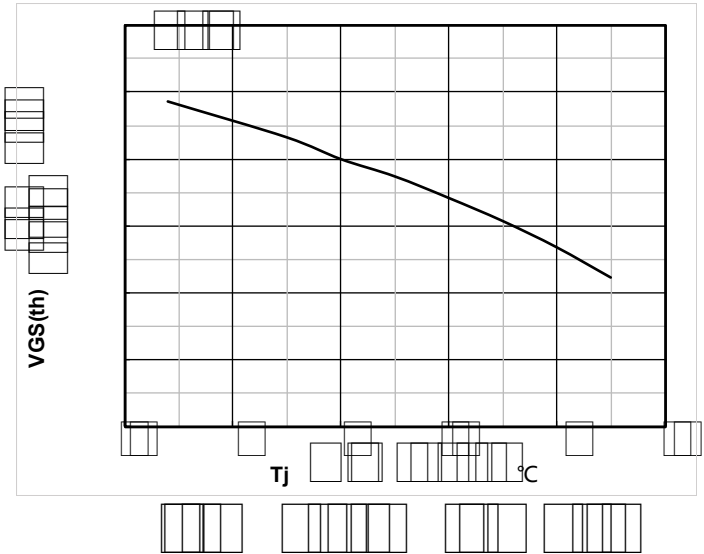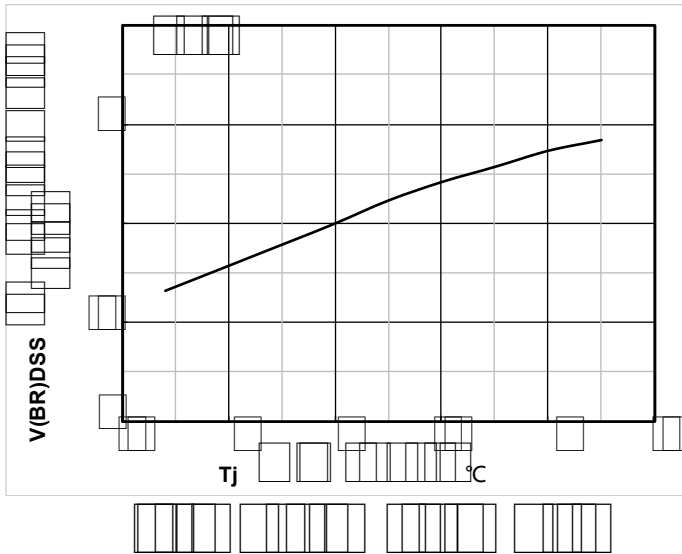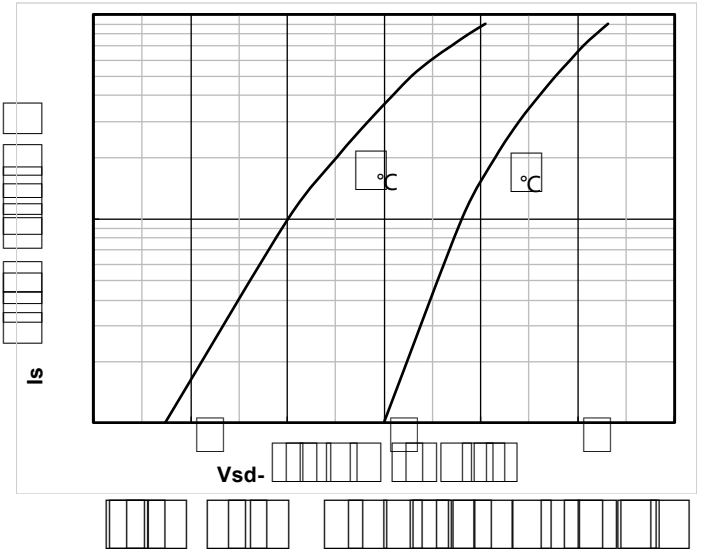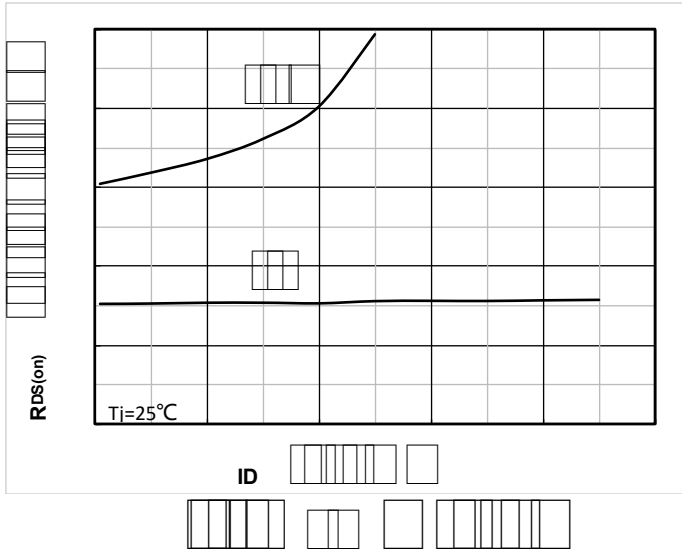




YJG120G10BR

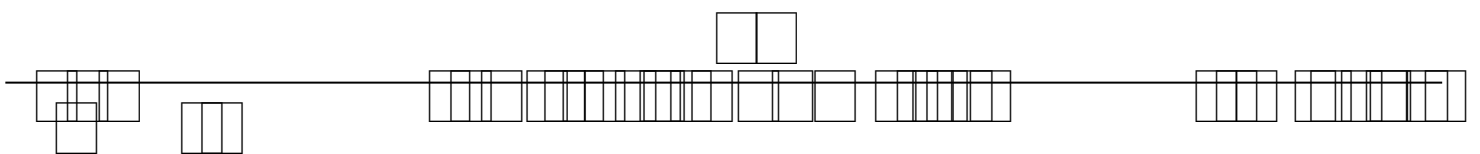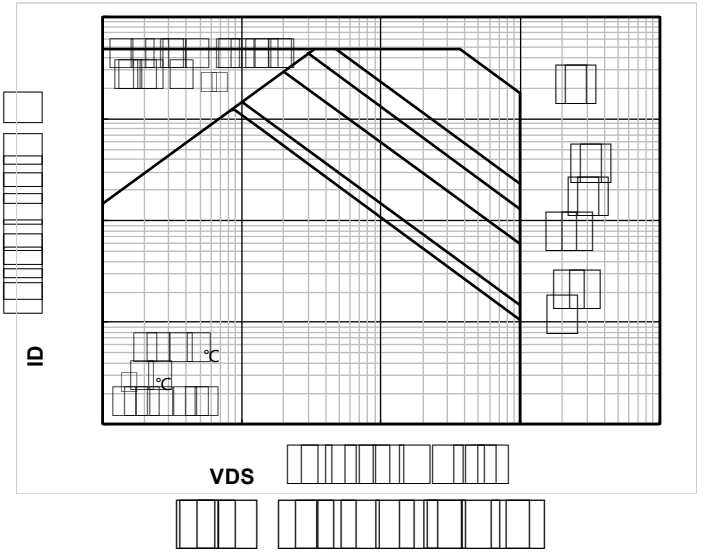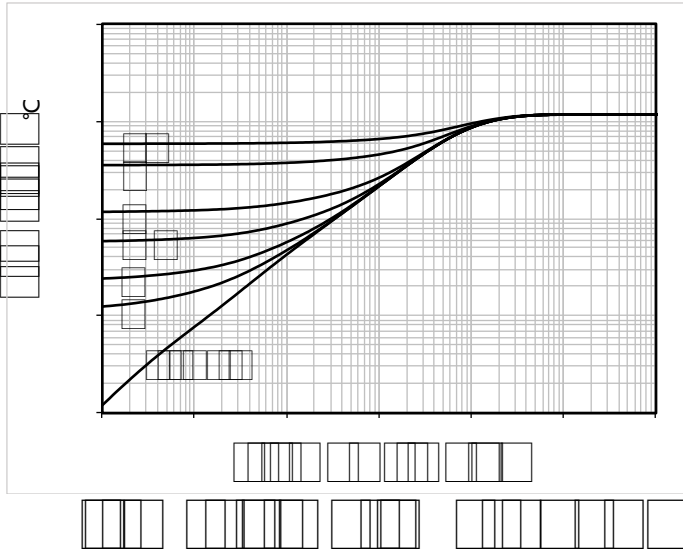




YJG120G10BR


PDFN5060-8L-D-0.95MM Package information

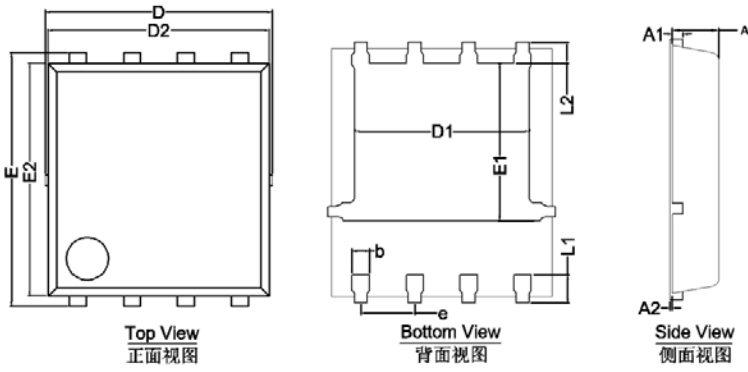

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
D	5.15	5.35	5.55
E	5.95	6.05	6.15
A	0.85	0.95	1.00
A1	0.203 BSC		
A2			0.08
D1	4.25	4.35	4.45
E1	3.525	3.625	3.725
D2		5.20	
E2		5.55	
L1	0.45	0.55	0.65
L2	0.68 BSC		
b	0.3	0.4	0.5
e	1.27 BSC		

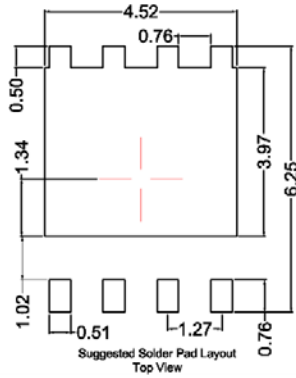

Note:
 1. Controlling dimension: In millimeters.
 2. General tolerance: ± 0.10 mm.
 3. The pad layout is for reference purposes only.

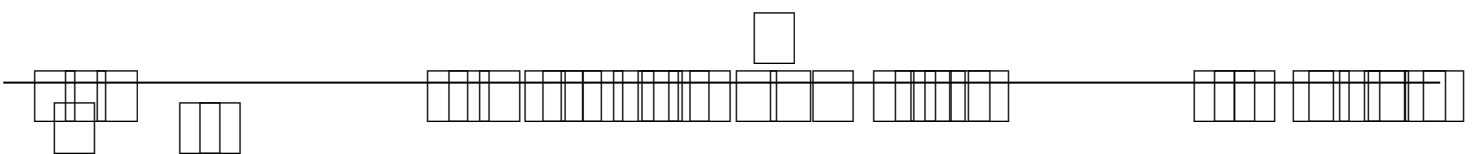



YJG120G10BR

Disclaimer

[Redacted text block containing multiple lines of illegible content]