

N-Channel and P-Channel Complementary MOSFET

Product Summary

NMOS

V_{DS}	30V
I_D	20A
$R_{DS(ON)}$ (at $V_{GS}=10V$)	20m
$R_{DS(ON)}$ (at $V_{GS}=4.5V$)	30m


PMOS

V_{DS}	-30V
I_D	-20A
$R_{DS(ON)}$ (at $V_{GS}=-10V$)	18m
$R_{DS(ON)}$ (at $V_{GS}=-4.5V$)	25m
100% EAS Tested	


General Description

Moisture Sensitivity Level 3
Epoxy Meets UL 94 V-0 Flammability Rating
Halogen Free


Applications



Top View



Bottom View



DFN3333-8L

Absolute Maximum Ratings ($T_A=25$ unless otherwise noted)

Parameter		Symbol	NMOS	PMOS	Unit
Drain-source Voltage		V_{DS}	30	-30	V
Gate-source Voltage		V_{GS}	± 20	± 20	V
Drain Current	$T_A=25^\circ C$	I_D	6.5	7.5	A
	$T_A=100^\circ C$		4	4.7	
	$T_C=25^\circ C$		20	-20	
	$T_C=100^\circ C$		12	-12	
Pulsed Drain Current ^A		I_{DM}	60	-80	A
Avalanche energy ^B		EAS	25	81	mJ
Total Power Dissipation ^C	$T_A=25^\circ C$	P_D	2	2	W
	$T_A=100^\circ C$		0.8	0.8	
	$T_C=25^\circ C$		27	22	
	$T_C=100^\circ C$		11	9	
Junction and Storage Temperature Range		T_J, T_{STG}	-55 +150	-55 +150	$^\circ C$

Thermal resistance

Parameter		Symbol	NMOS		PMOS		Units
			Typ	Max	Typ	Max	
Thermal Resistance Junction-to-Ambient ^D	Steady-State	R	50	62.5	50	62.5	/W
Thermal Resistance Junction-to-Case	Steady-State	R	3.5	4.5	4.5	5.5	

Ordering Information (Example)

PREFERRED P/N	PACKING CODE	Marking	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
YJQ20NP03A	F1	Q20NP03A	5000	10000	100000	1 reel



YJQ20NP03A

NMOS Electrical Characteristics ($T_J=25$ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250$	30	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=30V, V_{GS}=0V$	-	-	1	
		$V_{DS}=30V, V_{GS}=0V, T_J=150$	-	-	100	
Gate-Body Leakage Current	I_{GSS}	$V_{GS}=20V, V_{DS}=0V$	-	-	100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250$	1.0	1.5	2.5	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=20A$	-	14	20	m
		$V_{GS}=4.5V, I_D=10A$	-	22	30	
Diode Forward Voltage	V_{SD}	$I_S=20A, V_{GS}=0V$	-	0.85	1.2	V
Gate resistance	R_G	$f=1MHz$	-	2	-	
Maximum Body-Diode Continuous Current	I_S		-	-	20	A
Dynamic Parameters						
Input Capacitance	C_{iss}	$V_{DS}=15V, V_{GS}=0V, f=1MHz$	-	380	-	pF
Output Capacitance	C_{oss}		-	75	-	
Reverse Transfer Capacitance	C_{rss}		-	60	-	
Switching Parameters						
Total Gate Charge	Q_g	$V_{GS}=10V, V_{DS}=15V, I_D=10A$	-	12.5	-	nC
Gate-Source Charge	Q_{gs}		-	2.8	-	
Gate-Drain Charge	Q_{gd}		-	2.5	-	
Reverse Recovery Charge	Q_{rr}	$I_F=10A, di/dt=350A/us$	-	1.7	-	nC
Reverse Recovery Time	t_{rr}		-	18	-	ns
Turn-on Delay Time	$t_{D(on)}$	$V_{GS}=10V, V_{DD}=15V, I_D=10A$ $R_{GEN}=3$	-	5	-	ns
Turn-on Rise Time	t_r		-	31	-	
Turn-off Delay Time	$t_{D(off)}$		-	15	-	
Turn-off fall Time	t_f		-	23	-	



YJQ20NP03A

PMOS Electrical Characteristics (T_J=25 unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} = 0V, I _D =-250	-30	-	-	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =-30V, V _{GS} =0V	-	-	-1	
		V _{DS} =-30V, V _{GS} =0V, T _J =150	-	-	-100	
Gate-Body Leakage Current	I _{GSS}	V _{GS} = 20V, V _{DS} =0V	-	-	100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D =-250	-1.0	-1.5	-2.5	V
Static Drain-Source On-Resistance	R _{DS(on)}	V _{GS} =-10V, I _D =				



YJQ20NP03A

■ NMOS Typical Electrical and Thermal Characteristics Diagrams

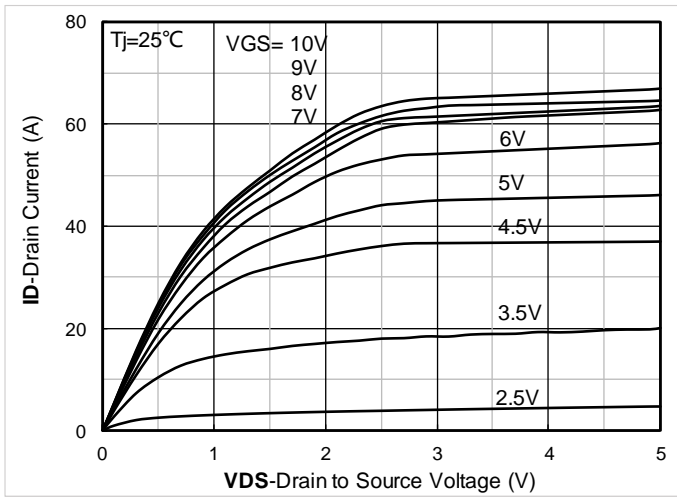


Figure 1. Output Characteristics

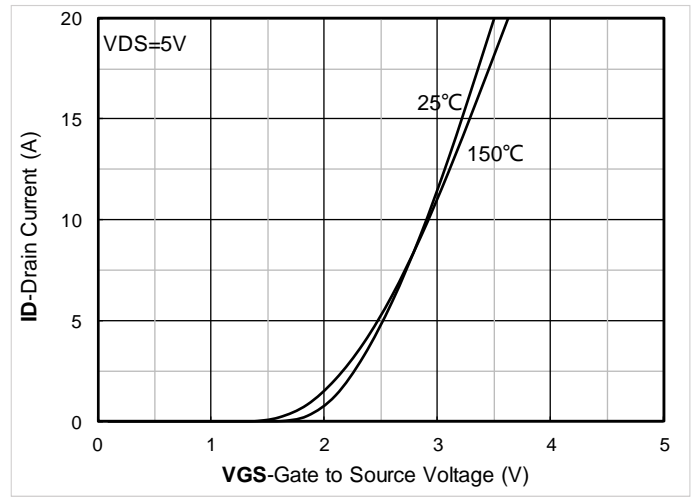


Figure 2. Transfer Characteristics

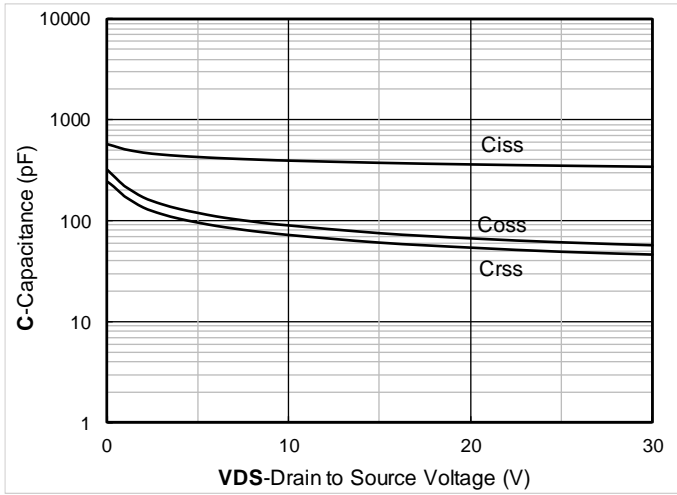


Figure 3. Capacitance Characteristics

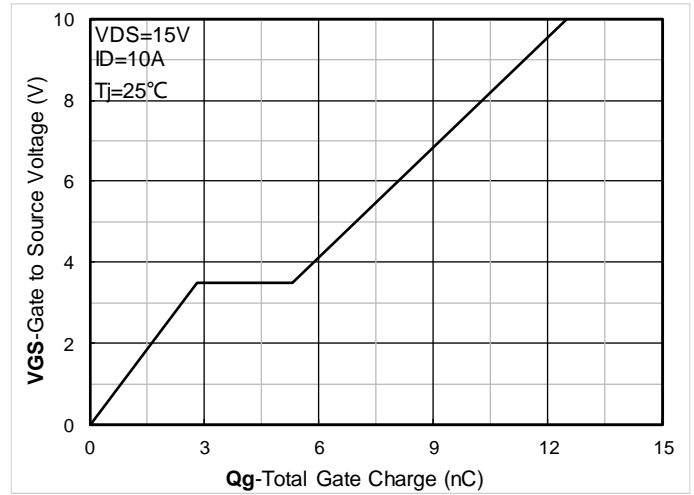


Figure 4. Gate Charge

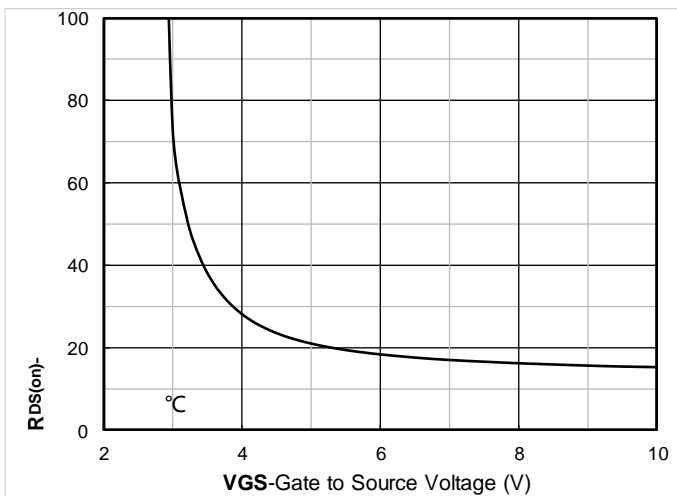


Figure 5. On-Resistance vs Gate to Source Voltage

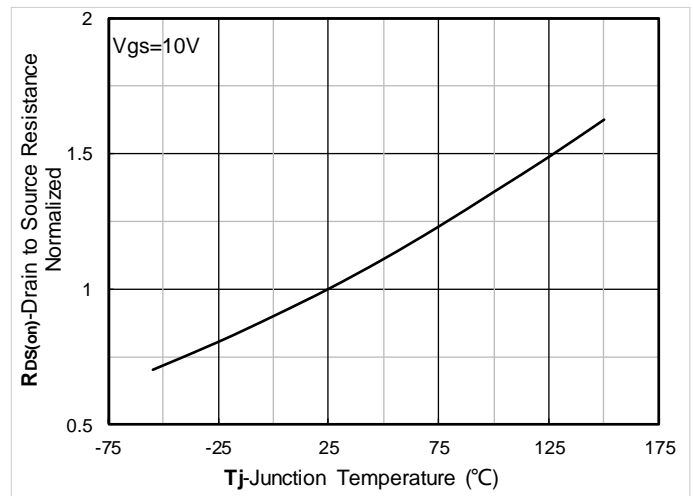


Figure 6. Normalized On- Resistance



YJQ20NP03A

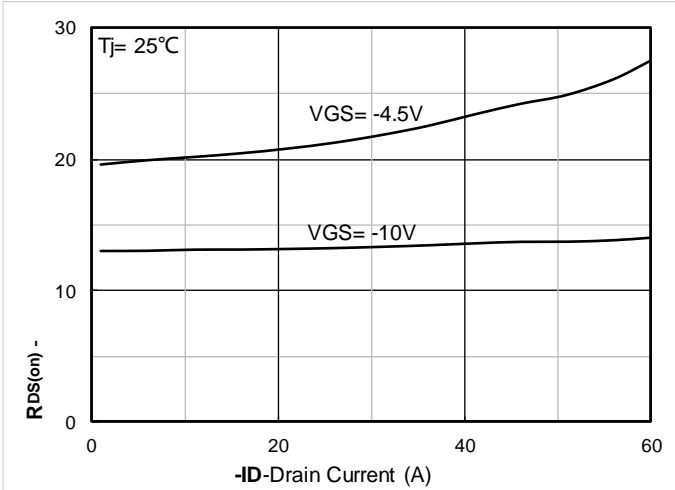


Figure 7. RDS(on) VS Drain Current

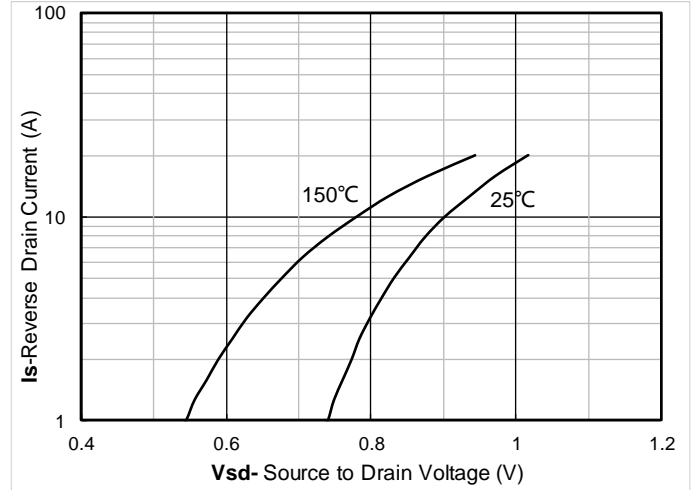


Figure 8. Forward characteristics of reverse diode

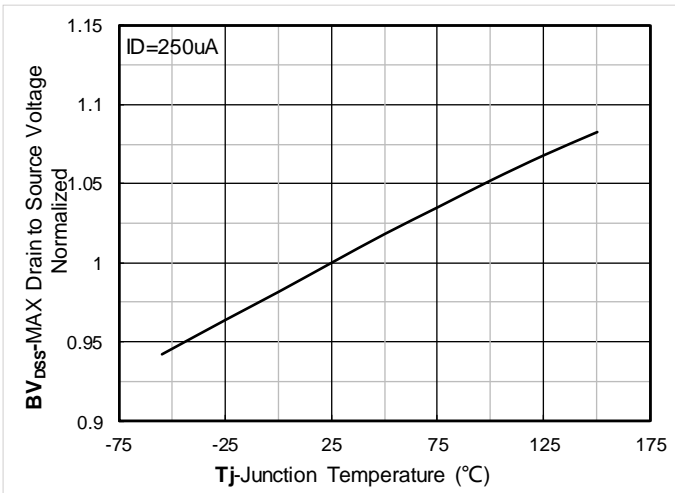


Figure 9. Normalized breakdown voltage

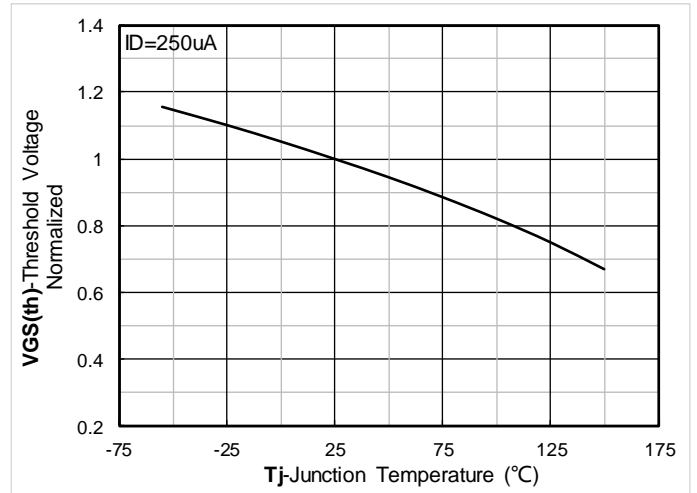


Figure 10. Normalized Threshold voltage

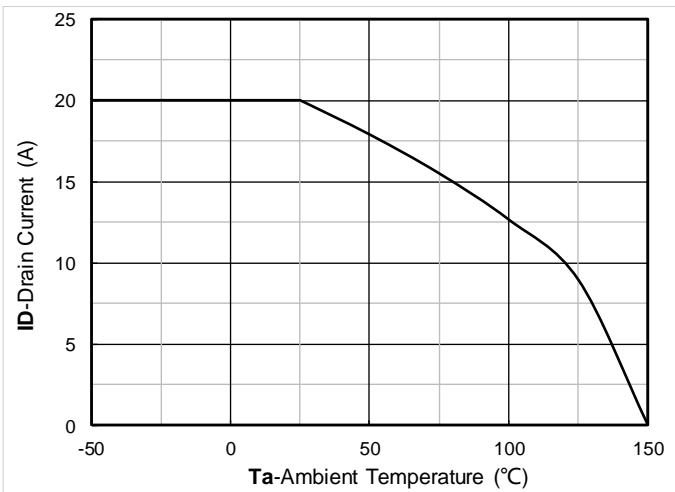


Figure 11. Current dissipation

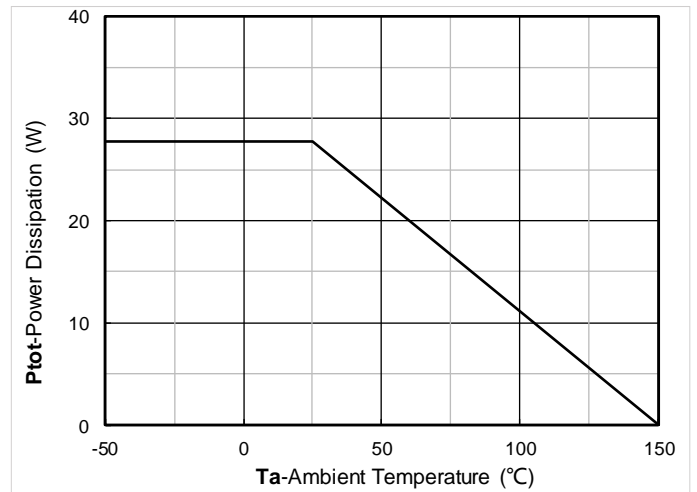


Figure 12. Power dissipation



YJQ20NP03A

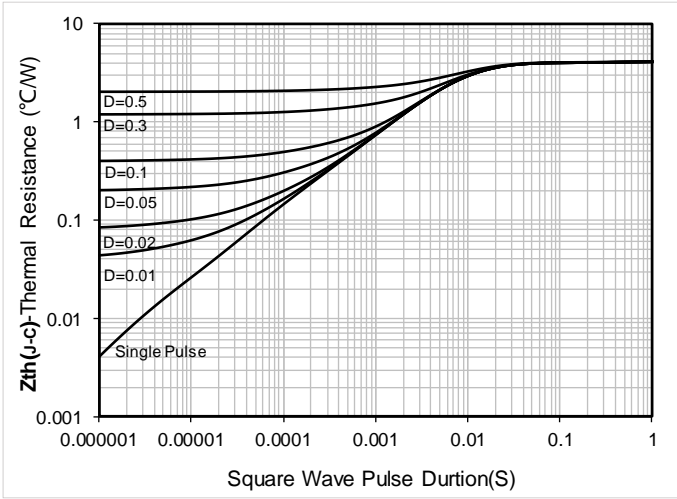


Figure 13. Maximum Transient Thermal Impedance

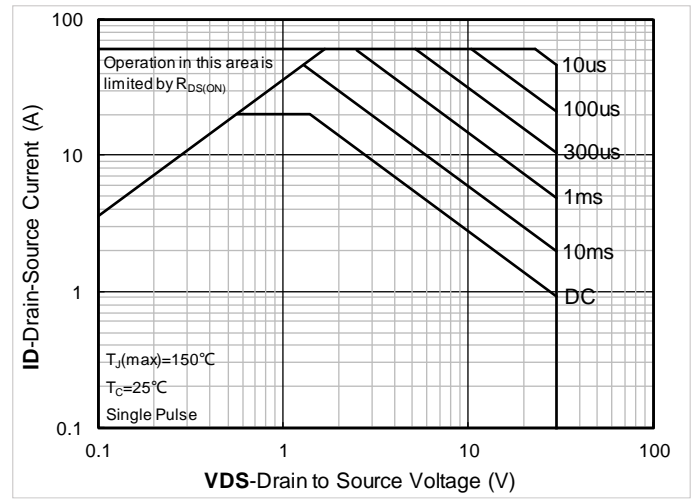


Figure 14. Safe Operation Area

PMOS Typical Electrical and Thermal Characteristics Diagrams

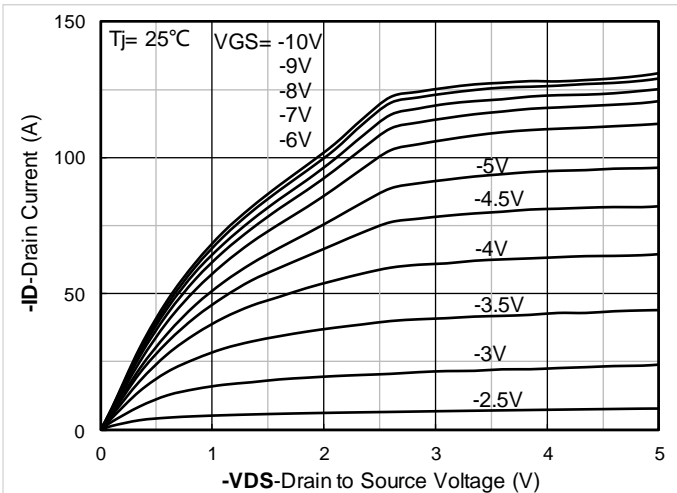


Figure 1. Output Characteristics

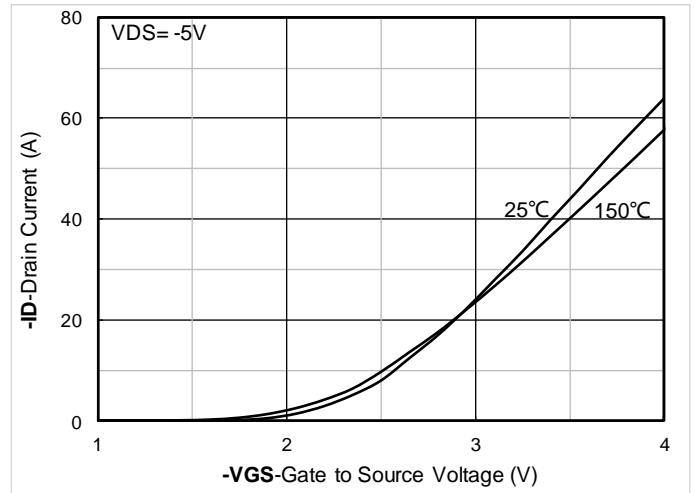


Figure 2. Transfer Characteristics

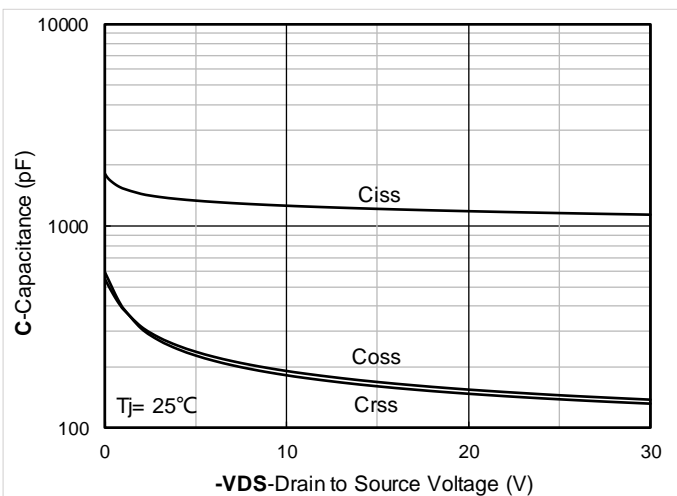


Figure 3. Capacitance Characteristics

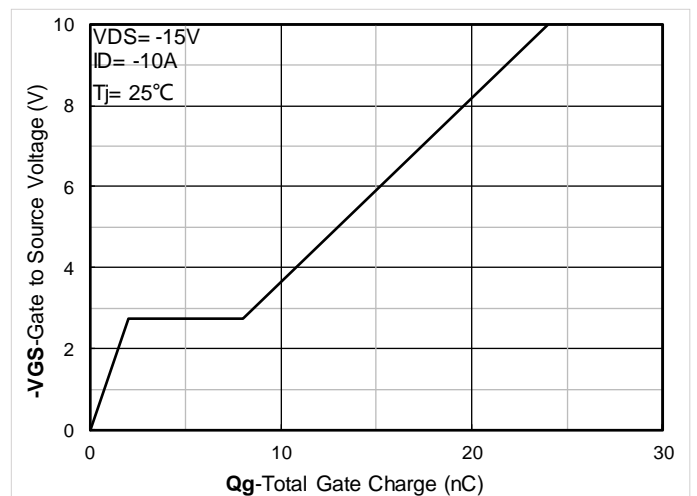


Figure 4. Gate Charge



YJQ20NP03A

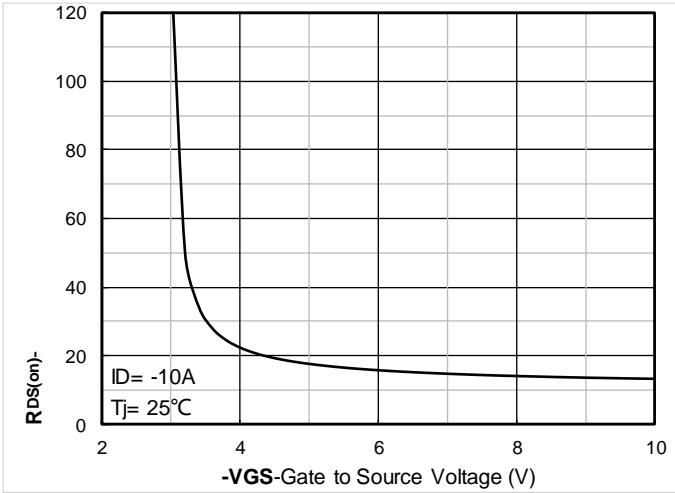


Figure 5. On-Resistance vs Gate to Source Voltage

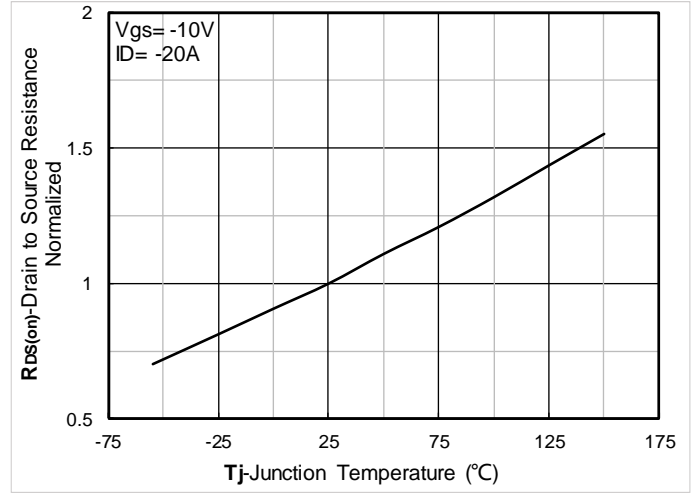


Figure 6. Normalized On-Resistance

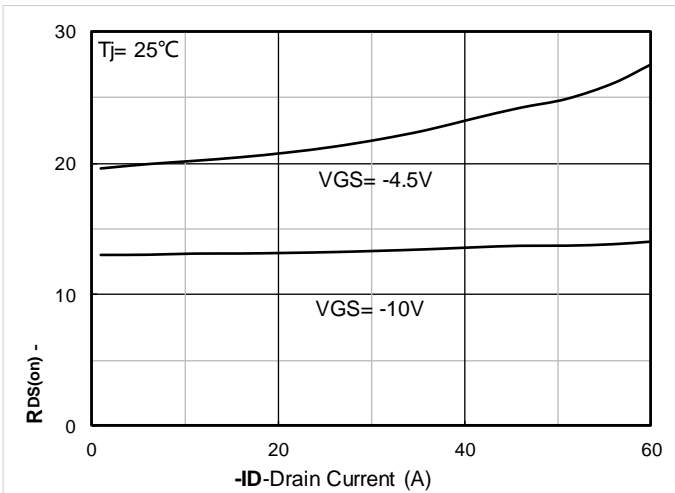


Figure 7. RDS(on) VS Drain Current

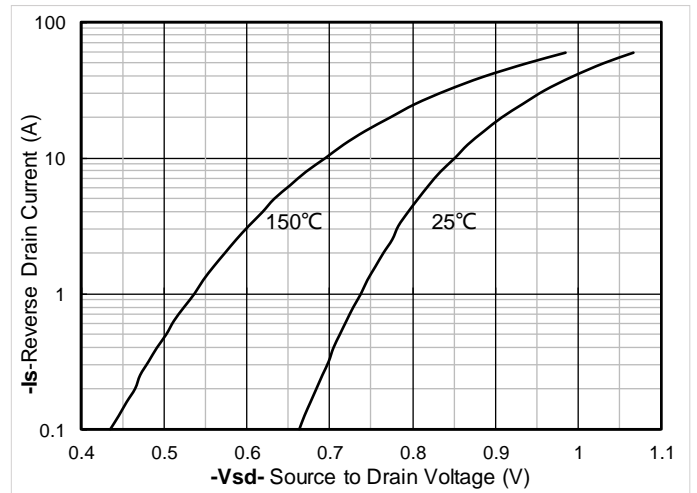


Figure 8. Forward characteristics of reverse diode

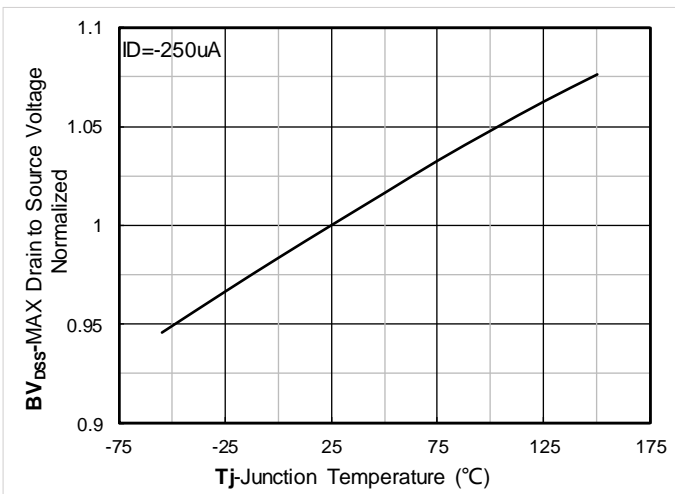


Figure 9. Normalized breakdown voltage

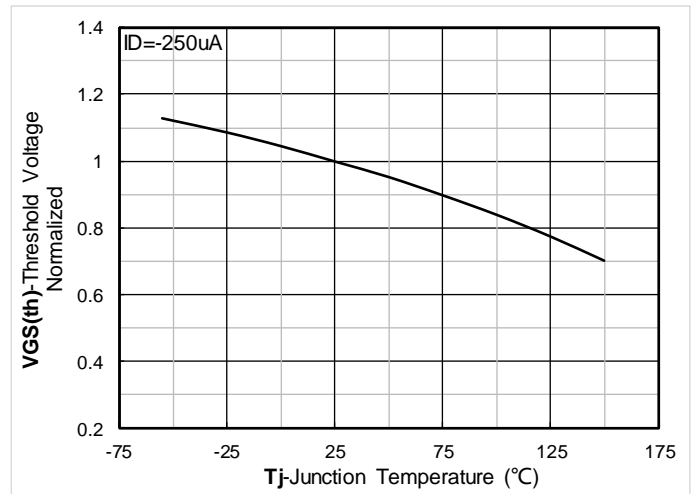


Figure 10. Normalized Threshold voltage



YJQ20NP03A

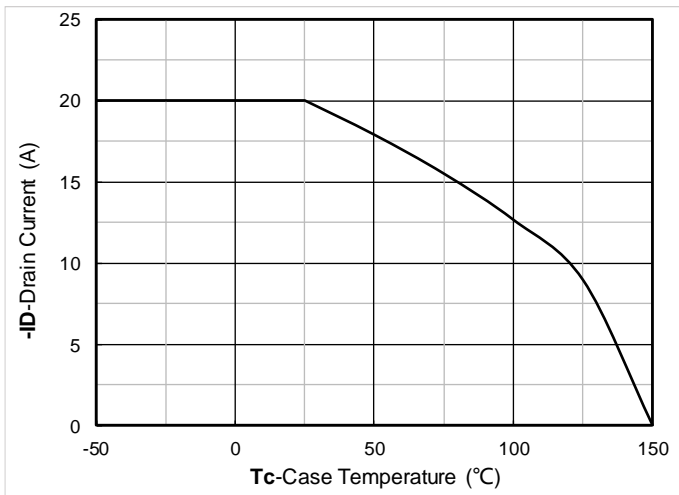


Figure 11. Current dissipation

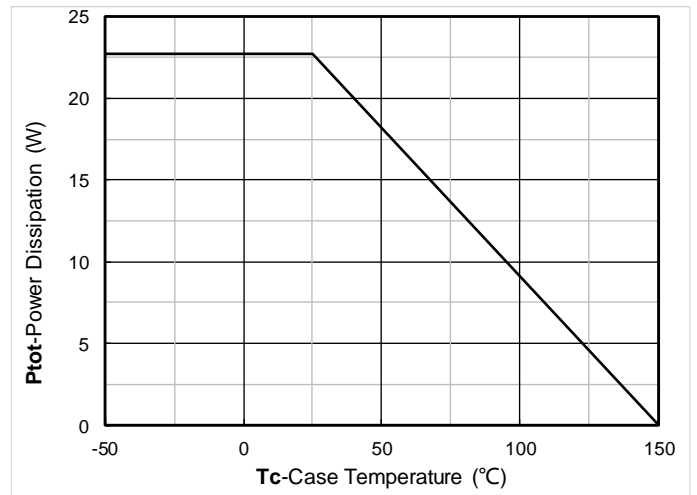


Figure 12. Power dissipation

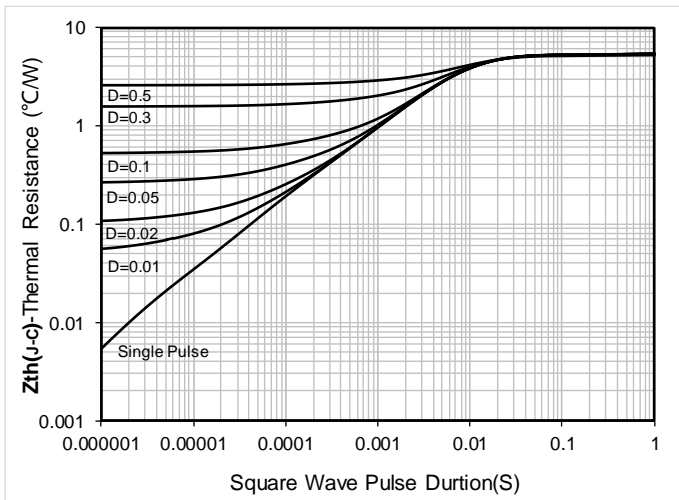


Figure 13. Maximum Transient Thermal Impedance


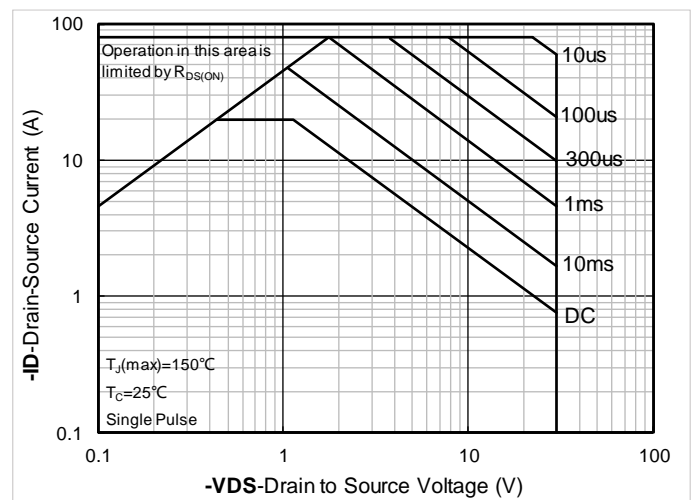


Figure 14. Safe Operation Area



YJQ20NP03A


DFN3333-8L-B-0.8MM Package information

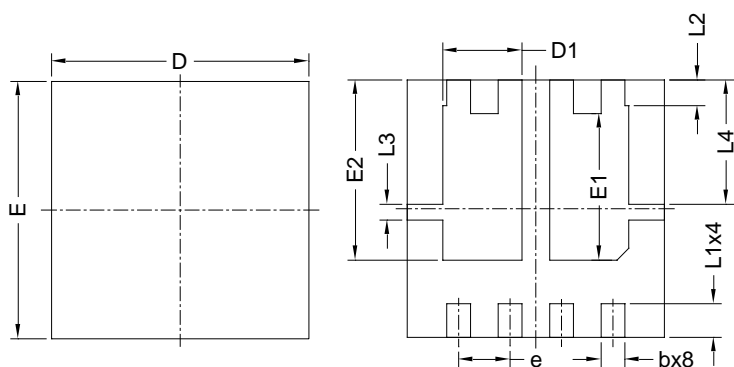


Top View

Bottom View

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
D	3.15	3.25	3.35
E	3.15	3.25	3.35
A	0.70	0.80	0.90
A1	0.20 BSC		
A2			0.10
D1	0.90	1.00	1.10
E1	1.75	1.85	1.95
E2	2.175	2.275	2.375
L1	0.325	0.425	0.525
L2	0.325 BSC		
L3	0.200 BSC		
L4	1.570 BSC		
b	0.20	0.30	0.40
e	0.65 BSC		



Side View

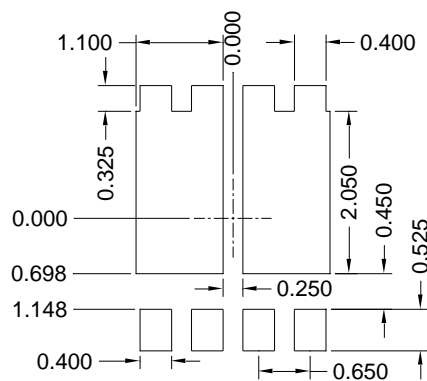

Suggested Solder Pad Layout
Top View

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.10 mm.
3. The pad layout is for reference purposes only.



YJQ20NP03A

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com>